

HALOGEN FLOODLIGHT

CFB500-Black/CFW500-White

CFB150-Black/CFW150-White

INSTRUCTIONS FOR USE

***** IMPORTANT *****

Unit is for outdoor use only.

Unit must be mounted on a non-flammable surface as a fixed luminaire, and is not suitable for portable use.

Ensure adequate ventilation space is allowed between the unit and any object above, in front or to either side of the unit.

Suggested space is 0.5m above, 0.3m to either side & 1.0m in front.

The unit can get very hot during use. Ensure the unit has cooled before handling.

In the event of the cover glass shattering, do not replace with normal household glass. Contact the Timeguard customer helpline for replacement details.

If in any doubt, consult a qualified tradesperson or electrician.

INSTALLATION

Switch off the electricity at the fuse box by removing the relevant fuse or switching off the circuit breaker before proceeding with the installation.


Unfasten the screw on the top of the floodlight. Install the halogen bulb, making sure not to touch the bulb with bare hands. It is suggested that the bulb is handled using a dry cloth.

Ensure the bulb is correctly fitted in the lampholder before use.

Re-attach the front cover, do not overtighten the fixing screw.

Fasten the mounting bracket to the wall using suitable screws and rawl plugs.

It is suggested that 3-core cable of 1mm² gauge is used. Pass this cable through the cable entry grommet in the wiring box and connect to the terminals as shown in the diagram. Affix the cable clamp.

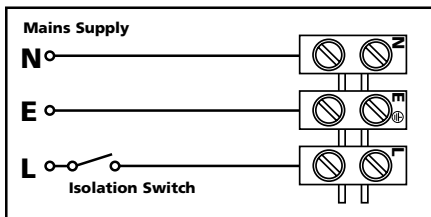

Re-attach the wiring box cover, ensuring a weatherproof seal is obtained.

Fix the floodlight to the bracket.

SPECIFICATIONS

Lamp Type	230V Linear Tungsten Halogen (R75 cap) 150W max (CFB150 CFW150), 500W max (CFB500 CFW500)
Power Supply	230 V AC ~ 50Hz
Environmental Protection	IP44 (suitable for outdoor use)
EC Directives	Conforms to 73/23/EEC, 89/336/EEC

If you experience problems, do not immediately return the unit to store.

Telephone the Timeguard Customer Helpline

020 8450 0515

Qualified Customer Support Co-ordinators will be on-line to assist in resolving your query.

For a product brochure please contact:

Timeguard Ltd., Victory Park, 400 Edgware Road, London NW2 6ND or email csc@timeguard.com

PREPARED BY
INSTALLATION & OPERATING
INSTRUCTIONS
SWITCH