

TIMEGUARD®

LED Ready Wall Lights

UDSS1 - Fixed single spot light - stainless steel

UDSS2 - Up/down light - stainless steel

UDSS3 - Adjustable single spot light - stainless steel

UDB1 - Fixed single spot light - black

UDB2 - Up/down light - black

UDB3 - Adjustable single spot light - black



Installation & Operating Instructions

1. General Information

These instructions should be read carefully and retained for further reference and maintenance.

2. Safety

- Before installation or maintenance, ensure the mains supply to the luminaire is switched off and the circuit supply fuses are removed or the circuit breaker turned off.
- It is recommended that a qualified electrician is consulted or used for the installation of this luminaire and install in accordance with the current IEE wiring and Building Regulations.
- Check that the total load on the circuit including when this luminaire is fitted does not exceed the rating of the circuit cable, fuse or circuit breaker.


1

3. Technical Specifications


- 230V AC 50 Hz.
- This luminaire is of class I construction and must be earthed.
- 35W Halogen GU10 or LED equivalent (lamp not supplied).
- IP65 Rated suitable for restricted external applications.
- -5° to 55°C Operating temperature.
- CE Approved.

4. Installation

- Remove wall plate from light fitting, by removing the two nuts.
- Mark the position of the mounting holes on the wall.
- Drill the holes for the wall plugs ensuring not to infringe with any gas/water pipes or electrical cables that may be hidden below the surface.
- Secure the supply cable into the luminaire through the hole(s) provided ensuring that a cable gland, grommet or sealing compound is used to maintain the IP rating of the luminaire.
- Mount the wall plate to the wall, using the fittings provided. Note: the wall plate must be mounted in the correct orientation, following the 'UP' arrow sticker located on the inside of the light fitting (fixed single spots and up/down lights). This will ensure the fitting will be the correct way up when it is reconnected to the wall plate.
- Replace the lamp unit over the wall plate, ensuring the main gasket is in place, and tighten the two nuts hand tight, to retain the lamp.



The UDSS2/UDB2 (only) must be mounted this way up;
Note: Orientation of screw threads.

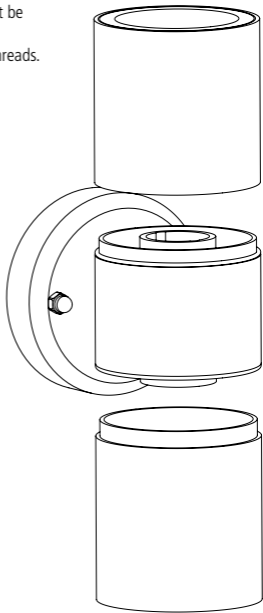


3

5. Connection Diagram

N E L

MAINS
SUPPLY

N
E
L



ISOLATION
SWITCH

4

6. Operation

Turn the power on to the isolating switch and test for correct operation.



5

3 Year Guarantee

In the unlikely event of this product becoming faulty due to defective material or manufacture within 3 years of the date of purchase, please return it to your supplier in the first year with proof of purchase and it will be replaced free of charge. For the second and third years or any difficulty in the first year telephone the helpline on 020 8450 0515.

Note: A proof of purchase is required in all cases. For all eligible replacements (where agreed by Timeguard) the customer is responsible for all shipping/postage charges outside of the UK. All shipping costs are to be paid in advance before a replacement is sent out.

If you experience problems, do not immediately
return the unit to the store.

Telephone the Timeguard Customer Helpline;

HELPLINE

020 8450 0515

or email helpline@timeguard.com

Qualified Customer Support Co-ordinators will be on-line
to assist in resolving your query.



A **theben** Group Company

For a product brochure please contact:

Timeguard Limited.

Victory Park, 400 Edgware Road,
London NW2 6ND

Sales Office: 020 8452 1112
or email csc@timeguard.com

www.timeguard.com

67-058-523 (Issue 1)