

Switched ON!

THE OFFICIAL TIMEGUARD NEWSLETTER

Stay up to date with our new product lineup for 2023!

THE SPUR OF THE MOMENT

NEW Wi-Fi Fused Spur - Pages 2-3



Pages 2-3

GO REMOTE WITH WI-FI CONTROL

Wi-Fi PIR & PIR Twin Floodlight - Pages 4-5



Pages 4-5

LED THERE BE LIGHT

LED Single & Twin Head PIR Floodlight Range - Pages 6-7



Pages 6-7

ALWAYS A BRIGHT IDEA


IP65 LED PIR Bulkheads & 360° PIR Presence Detectors - Pages 8-9



Pages 8-9

SAVE TIME, MONEY & ENERGY. THINK SAFE, WORK SAFER

Trade Time Controller, Automatic Load Controller & Rotary Isolators - Pages 10-11

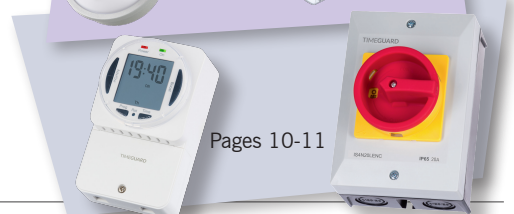


Pages 10-11

The spur of the moment

Quick & easy control of your.... Wall heaters, immersion heating, towel rails, home appliances, indoor & outdoor lighting, shop lighting etc. Simply control your chosen devices at anytime from anywhere with a Wi-Fi or mobile data connection. An IP66 version also available for outdoor use.



Use your mobile or tablet device to pair the FSTWIFITU to the 2.4GHz band of your Wi-Fi network via TuyaSmart.

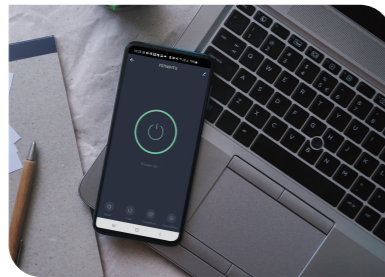

Once paired, configure the device name, programming schedule, and connection to smart services such as Hey Google and Alexa if required.



After following the guided smart services tutorial and device configuration, your FSTWIFITU will be ready for use and to be integrated into your smart home.

FSTWIFITU

Wi-Fi Fused Spur Timeswitch (Tuya Edition)



Flawlessly multi-task with the integration of your home smart speaker!




Organize and achieve more with the power of the FSTWIFITU!



Model:
FSTWIFITU

- App and Button Controlled.
- Double Pole Isolation Switch.
- Manual override.
- 13A (Resistive), 5A (Inductive).
- Fuse protection.
- Rear and bottom cable entries.
- Output and Wi-Fi LED status indicators.
- Daily, weekly or one time only programmes.
- Amazon Alexa and Hey Google compatible.
- Group multiple devices together for simultaneous switching.
- Smart automation options for triggering other compatible Tuya Smart devices.
- Custom scenarios for switching i.e. at Sunset switch ON, or at sunrise switch OFF.
- Load: 500W Fluorescent, 500W LED and 100W CFL Lighting.



Model:
FSTWIFITUTGV
IP66 Version



Go remote with Wi-Fi control.

Timeguards new Wi-Fi controlled PIR's give users the ability to control their devices locally and remotely with or without the load being connected!

WFPIRB

Wi-Fi PIR Sensor Black



or



Direct or Indirect Load Activation

The load can be physically connected via the switched live, or trigger another compatible Tuya Smart device wirelessly.



- 250W LED when the load is physical.
- Unlimited LED's when switching remotely.

WFPIRWH

Wi-Fi PIR Sensor White



- Works with 'Hey Google' and 'Alexa'.
- Continues to work offline with loss of a Wi-Fi connection.
- Up to a 140° detection with a 12 meter range.
- PIR supports adjustable pan and tilt function.
- 10 – 2000 Lux setting with learn option.
- Adjustable time delay settings (in app or offline), 30 seconds to 30 minutes.
- PIR can be used as a trigger to switch on equipment in and around the home even if not physically connected.



The WFPIR can also double up as a timer via the use of smart scenes on the Tuya Smart app, switching on for a set amount of time regardless if motion is detected, giving the PIR double functionality, while reducing the need for an additional timer on the circuit! This is truly a great hybrid combination offering more for less at the push of a button.

Compact Wi-Fi LED Lighting

A twin head 2x 10W Wi-Fi PIR floodlight with easy to use, remote adjustments for a customised bespoke lighting experience!



LED200WFB

2x 10W LED Wi-Fi PIR Twin Floodlight - Black

- Powerful 2000 lumen (2x 10W) twin head, IP55 floodlight.
- Up to a 140° detection with a 10 meter range.
- Continues to work offline with loss of a Wi-Fi connection.
- Works with 'Hey Google' and 'Alexa'.
- A range of Wi-Fi features include: Optional Hi-Lo dimming, Lux settings 10 to 1,000 lux, adjustable time-on (PIR activated) from 5 sec to 60 min, brightness selection and motion selection.
- Manual override facility.

- Simple snap in to wall plate with fast-fix pin terminals for a quick and easy installation. Corner bracket included.
- PIR can be used as a trigger to switch on equipment in and around the home even if not physically connected.
- Individual head pan and tilt light aiming adjustment.



Tuya Smart App control 3000K to 6500K colour temperature wheel.

LED there be light

Our LED100/200 range of energy-saving PIR floodlights are ideal for indoor and outdoor settings alike, featuring pan and tilt light aiming adjustment and an impressive level of brightness.



LED100PIRBP

LED100PIRBP

8.5W LED Compact Floodlight Single Flood With PIR – Black

LED100PIRWHP

White Version

- Powerful 8.5W LED compact PIR floodlight - single flood.
- Pan and tilt light aiming adjustment.
- Lumen output 1000 lumens.
- 180° 10m detection range.
- Adjustable time setting 10 seconds to 30 minutes.
- Manual override.
- IP55 ingress protection rating.
- Slave terminal available for additional external lighting loads; LED max 100W.
- Parallel switching facility - a maximum of 4x LED100PIRP floodlights can be wired in parallel to enable any detector to turn ON all the lights connected.



LED200PIRWHP

LED200PIRBP

17W LED Compact Floodlight Twin Flood With PIR – Black

LED200PIRWHP

White Version

- Powerful 2x 8.5W LED compact PIR floodlight - twin flood.
- Individual head pan and tilt light aiming adjustment.
- Lumen output 2000 lumens.
- 180° 10m detection range.
- Adjustable time setting 10 seconds to 30 minutes.
- Manual override.
- IP55 ingress protection rating.
- Slave terminal available for additional external lighting loads; LED max 100W.
- Parallel switching facility - a maximum of 4x LED100PIRP floodlights can be wired in parallel to enable any detector to turn ON all the lights connected.



LED100FLBP

LED100FLBP

8.5W LED Compact Floodlight Single Flood – Black

LED100FLWHP

White Version

- Powerful 8.5W LED compact PIR floodlight - single flood.
- Pan and tilt light aiming adjustment.
- Lumen output 1000 lumens.
- IP55 ingress protection rating.
- Simple snap in to wall plate with fast-fix pin terminals for a quick and easy installation.



LED100FLBP

LED200FLBP

17W LED Compact Floodlight Twin Flood With PIR – Black

LED200FLWHP

White Version

- Powerful 2x 8.5W LED compact PIR floodlight - twin flood.
- Individual head pan and tilt light aiming adjustment.
- Lumen output 2000 lumens.
- IP55 ingress protection rating.
- Simple snap in to wall plate with fast-fix pin terminals for a quick and easy installation.

**NIGHT
eye**



Always a bright idea

A powerful and energy saving alternative to standard bulkhead lights. Super-Slim die cast design with a tough exterior making them ideal for industrial, commercial and home installations.

LEDBH025WPIR

25W - 2000lm LED Energy Saver PIR Bulkhead Light (Oval)

LEDBHR25WPIR

Round Version

- Powerful 25W LED PIR bulkhead.
- IP65 ingress protection rating.
- Lumen output 2000 lumens.
- 100° detection angle and 6m range.
- PIR sensitivity adjustment 0.5 to 6m distance.
- PIR time-on adjustment 10 seconds to 5 minutes.
- Manual Override.
- Side and rear cable entries.



Powerful LED panel with a high lumen output without increased running costs.



Discreet and reliable, PIRfect


The PDFM1500N and PDRS1500N range offer up to a 360° area of detection for optimal coverage and control at all times. Now with flatter lens.



PDRS1500N

360° PIR Presence Detector - Surface Mount

- Enhanced 360° detection zone with 12m range for optimum coverage.
- PIR sensitivity adjustment and manual override.
- PIR time-on adjustment 1 minute to 30 minutes.
- IP55 ingress protection rating.
- Units can be wired in parallel (not exceeding total load).
- Switch rating:
 - 2000W Incandescent and Fluorescent.
 - 150W CFL (Low-loss or Electronic Ballast).
 - 600W LED lighting.
 - 250W Fan max.

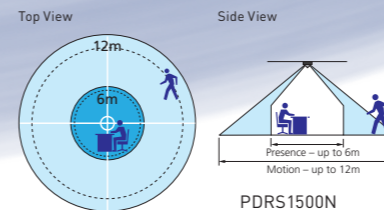


PDRS1500N detection range and coverage.



PDFM1500N

360° PIR Presence Detector - Flush Mount

- Enhanced 360° detection zone with 12m range for optimum coverage.
- PIR sensitivity adjustment and manual override.
- PIR time-on adjustment 1 minute to 30 minutes.
- IP44 ingress protection rating.
- Units can be wired in parallel (not exceeding total load).
- Switch rating:
 - 2000W Incandescent and Fluorescent.
 - 150W CFL (Low-loss or Electronic Ballast).
 - 600W LED lighting.
 - 250W Fan max.

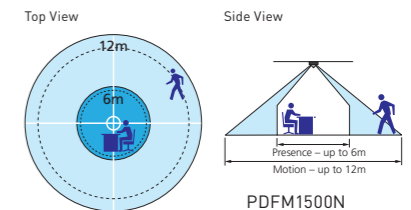

PDFM1500N detection range and coverage.

Save you time, money & energy

Our heavy duty trade timer allows for up to 20(8)A of switching, ideal for trade, and commercial settings! The ZV900B eliminates glow and flicker issues in LED/CFL lamps when used with 2-wire automatic light switches.

NTTHDS

20A 24 Hour/7 Day Compact Digital Heavy Duty Timeswitch

- 20(8)A 4.6Kw loading.
- Voltage free change over contacts.
- Programme suspension, loop and override to next programme function.
- 8 ON/8 OFF easy-set programmes per day. 56 ON, 56 OFF per week.
- Extra large "Easy View" backlit display with protective cover).
- Red LED "Mains ON" & Green LED "Output" indicators for easy viewing.
- Automatic Summer/ Winter changeover.
- Self cancelling override & boost options.



ZV900B

Automatic Switch Load Controller

- Eliminates glow and flicker issues in LED/CFL lamps when used with 2-wire automatic light switches (i.e. Timed, PIR, Photocell automatic switches).
- Under 1W power consumption.
- No additional cabling to the switch required.
- Fits in the ceiling through a 30mm hole.
- Specifically designed to operate with Timeguard ZV700, ZV700B, ZV210, ZV215, DS1N, DS2N, DSSN, DS4, ZV810, ST210 and ST810 when used with LED or CFL lighting.
- The ZV900B is suitable for other companies' 2-wire electronic wall switch products.

Only one ZV900B is required in the lighting circuit operated by automated control.



Small & powerful: Product height & width no larger than a 10p coin!



Think safety work safely

The Weathersafe Rotary Isolator range is tough, durable for outdoor switching protection. Designed with safety in mind.

IS4N20LENC

Weathersafe Large Bodied Rotary Isolator Switch – 4 Pole 20A

- Tough durable thermoplastic construction.
- Cable entry knockouts. (M20)
- Lockable switch prevents tampering.
- Interlocked front cover can only be removed when in OFF position.
- Switch can be removed from DIN Rail assembly allowing for a quick and easy fix.
- On-load switch disconnectors.
- Suitable for armoured cable.
- Solid neutral.



IS4N32LENC

Weathersafe Large Bodied Rotary Isolator Switch – 4 Pole 32A

- Tough durable thermoplastic construction.
- Cable entry knockouts. (M20)
- Lockable switch prevents tampering.
- Interlocked front cover can only be removed when in OFF position.
- Switch can be removed from DIN Rail assembly allowing for a quick and easy fix.
- On-load switch disconnectors.
- Suitable for armoured cable.
- Solid neutral.





Stay up to date

We continue to deliver the energy savings that owners and occupiers are looking for, combined with easy-installation that makes us an installers' favourite and of course, high quality and reliability are always top of the list. You can access our latest catalogue, newsletter and all of our product information at any time via www.timeguard.com. Here you will also find our latest information, press releases and downloading facilities for product operating instructions. Log onto Timeguard online now for simple selection of the right products for your needs.



Under the General Data Protection Regulation (GDPR) we at Timeguard Ltd need to ensure that you are happy for us to continue communicating with you.

NO LONGER WANT TO RECEIVE INFORMATION FROM TIMEGUARD?

If you do not wish to continue receiving our Newsletter and other product information, please complete the information below. Either fax back or scan and email back to marketing@timeguard.com to confirm you wish to opt out of receiving further information.

Please tick this box if you no longer wish to receive any further information from Timeguard and request that all your details are erased from our records.

Name: _____

Address: _____

Post Code: _____

Tel: _____

Email: _____

All information held by Timeguard, trading division of Deta Electrical Company Limited and is not passed on to any 3rd parties and is used solely by us to promote our products. Please also visit our website www.timeguard.com for our Privacy Policy.

FAX NOW on 020 8450 0635

or scan and email back to marketing@timeguard.com

WANT TO RECEIVE UPDATES FROM TIMEGUARD? PLEASE COMPLETE IN CLEAR CAPITAL LET TERS.

Name: _____

Address: _____

Post Code: _____

Tel: _____

Email: _____

FAX NOW on 020 8450 0635

or scan and email back to marketing@timeguard.com



Panattoni Park, Luton Rd, Chalton, Bedfordshire LU4 9TT
•Tel: 020 8452 1112 •Fax: 020 8450 0635

www.timeguard.com