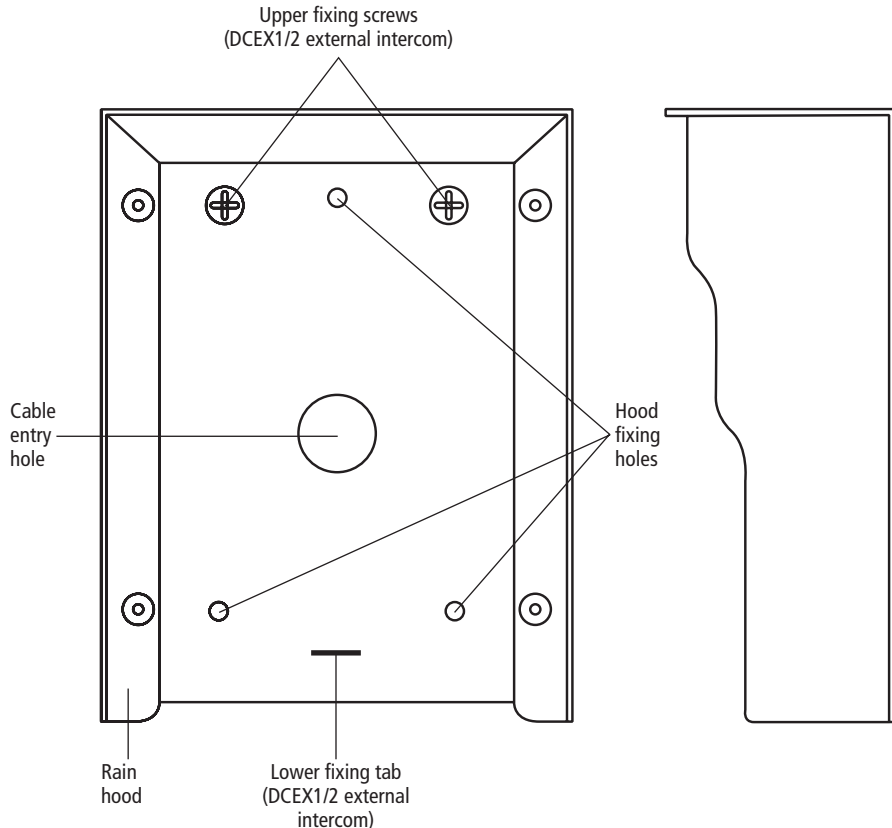


Introduction

The DCEXH1 and DCEXH2 rain hoods are an optional extra to improve rain protection for the DCEX1/2 (DCEXH1) and the DCEX3/4 (DCEXH2) door entry systems.

These hoods will not fit any other door entry system in the Timeguard range.



**Fig 1a – Rain Hood DCEXH1
(mounting face for DCEX1/2
external intercom - DCEXH2 similar)**

**Fig 1b – Rain
Hood DCEXH1
(side view)**

Fixing the Rain Hood

The DCEX external intercom mounts on the 3 point fixing provided by the rain hood. There is a small gap between the external intercom top surface and the top of the rain hood.

Decide on a position for the DCEX external intercom (see main instructions) and mark the positions for three holes using the rain hood as a template. Drill and if necessary plug these holes to take No. 8 roundhead screws.

Offer up the rain hood and drive the three screws home.

As the gap between the back of the internal intercom and the rain hood mounting face is probably not sufficient to accommodate the cable being used we suggest that a hole is made through the hood mounting face and the wall behind that will be directly above the terminals on the external intercom.

Terminate the cables from the internal intercom(s) and the door catch (if fitted) and offer up the external intercom to the rain hood feeding the cable(s) back through the hole in the rain hood and the masonry behind it.

Push the top of the external intercom so that it slides against the inside of the top of the hood with its base angled outwards to clear the lower fixing tab. Locate the intercom keyhole fixings on the hood upper fixing screws and slide down keeping clear of the lower fixing tab.

Finally locate the slot in the intercom over the hood lower fixing tab and tighten the screw provided.

Cleaning

Unplug mains adaptor before cleaning product.

Clean internal and external intercoms with a damp cloth only – no cleaning agents. Remove dust deposits from the louvres on the internal intercom with a soft brush or vacuum cleaner.

3 Year Guarantee

In the unlikely event of this product becoming faulty due to defective material or manufacture within 3 years of the date of purchase, please return it to your supplier in the first year with proof of purchase and it will be replaced free of charge. For years 2 and 3 or any difficulty in the first year telephone the helpline on 020 8450 0515.



RAIN HOODS FOR DOOR ENTRY SYSTEMS

Model: DCEXH1 – for use with DCEX1/2 door entry systems

DCEXH2 – for use with DCEX3/4 door entry systems



DCEXH1

DCEXH2 (shown fitted to DCEX4)

DCEXH2

HELPLINE

020-8450-0515



For a product brochure please contact:

Timeguard Ltd.

Victory Park, 400 Edgware Road,
London NW2 6ND


020-8452-1112

or email csc@timeguard.com

INSTALLATION & OPERATING INSTRUCTIONS


EXTERNAL INTERCOM FIXING TEMPLATE

Models: DCEX1 and DCEX2

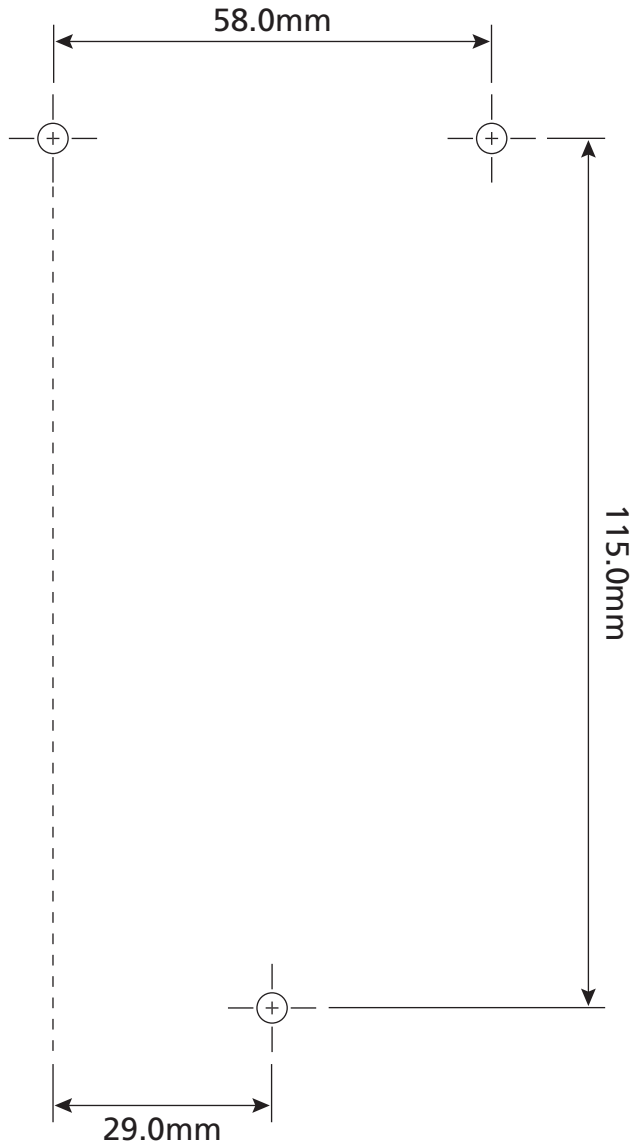

DOORCOM
EXTERNAL INTERCOM FIXING TEMPLATE

Models: DCC3, DCC4, DCEX3 and DCEX4

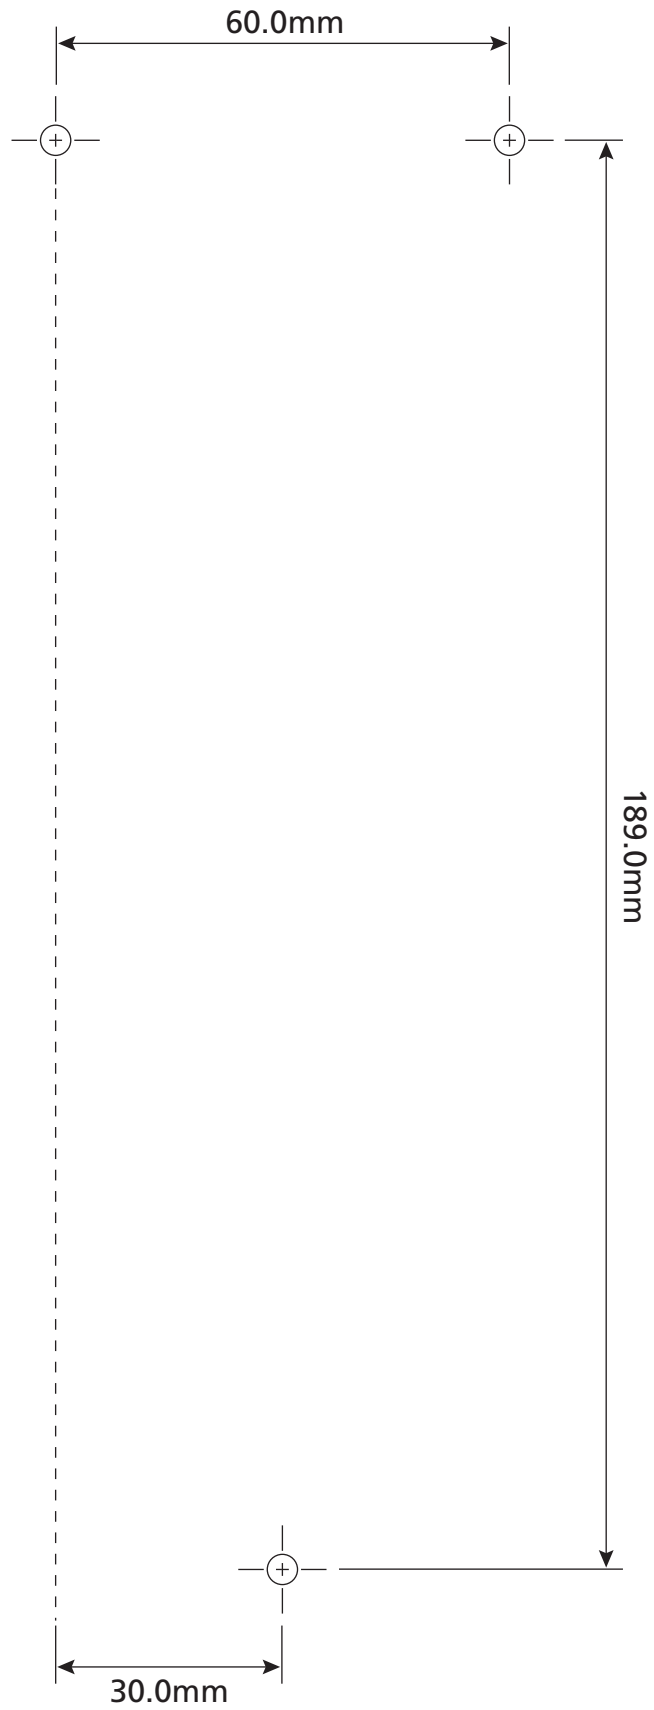

67-058-240